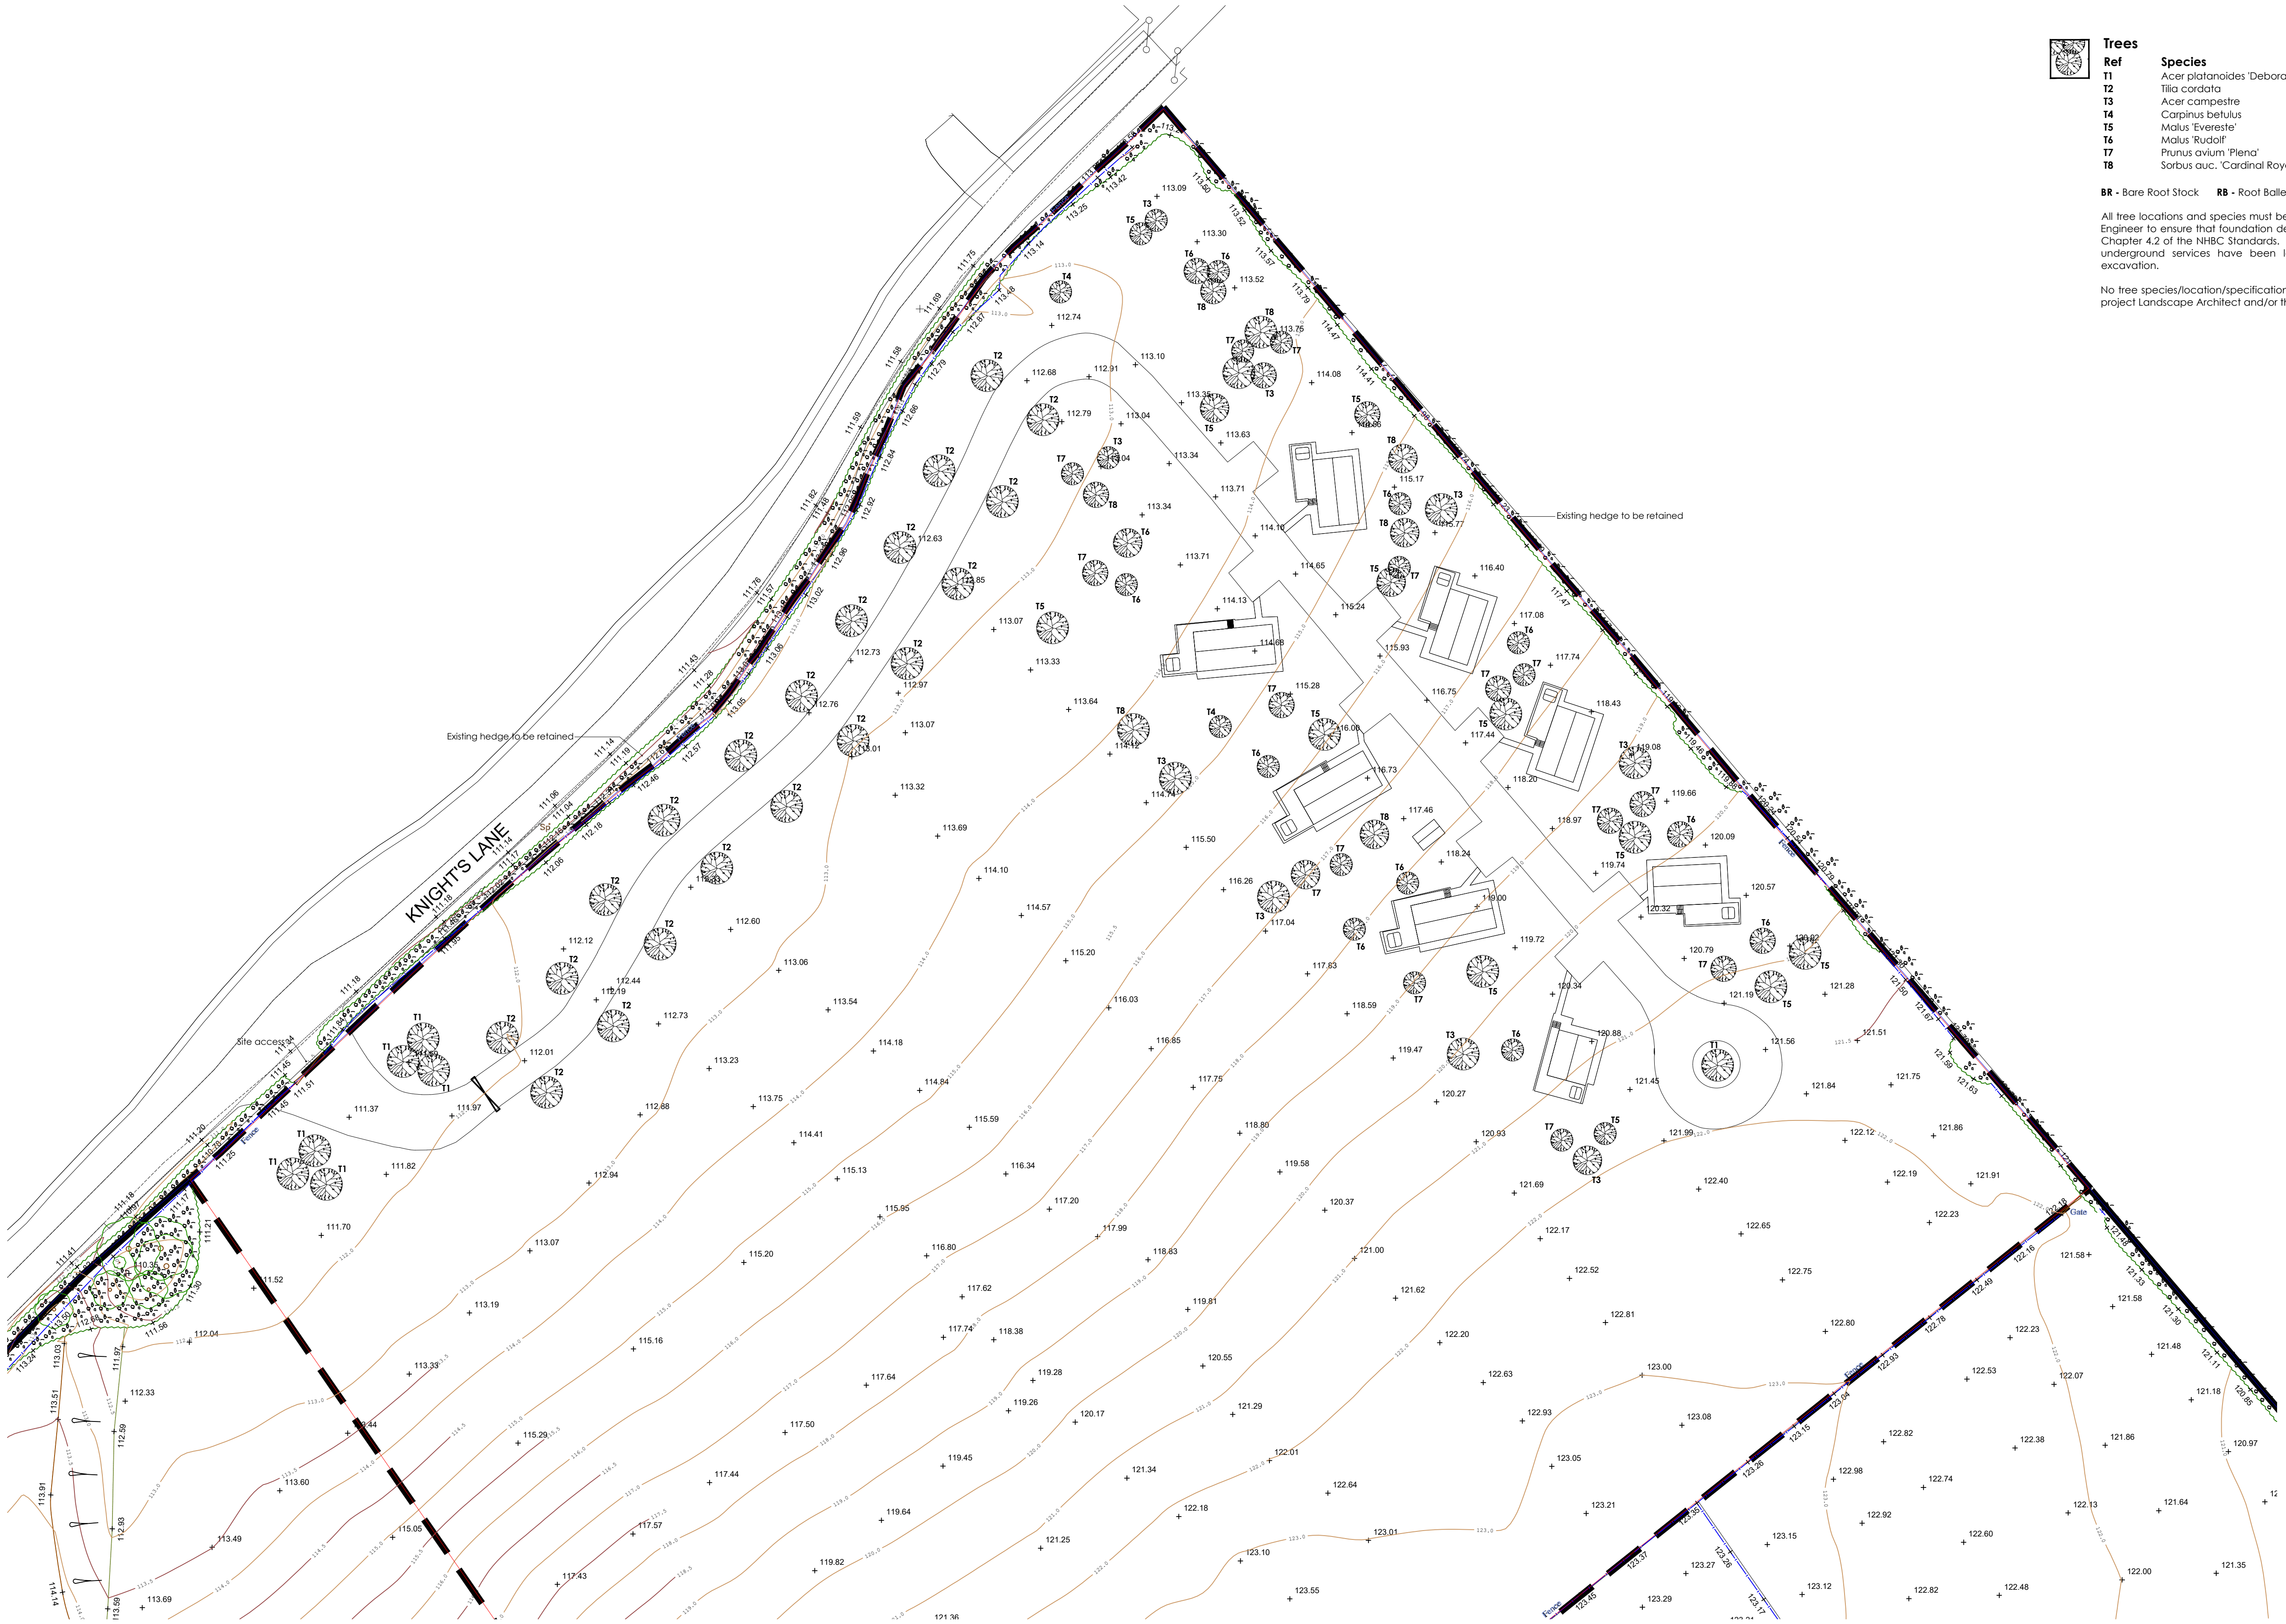


Trees

Ref	Species	Supply	Size(cm)	Girth(cm)	No.
T1	Acer platanoides 'Deborah'	EHStd RB	450-650	18-20	7
T2	Tilia cordata	EHStd RB	450-650	18-20	20
T3	Acer campestre	EHStd RB	425-600	14-16	9
T4	Carpinus betulus	HStd BR	350-425	12-14	2
T5	Malus 'Evereste'	HStd BR	350-425	12-14	12
T6	Malus 'Rudolf'	EHStd BR	425-600	14-16	12
T7	Prunus avium 'Plena'	EHStd BR	425-600	14-16	15
T8	Sorbus auc. 'Cardinal Royal'	HStd BR	350-425	12-14	7

BR = Bare Root Stock RB = Root Balled Stock

All tree locations and species must be taken into consideration by the project Structural Engineer to ensure that foundation design accords with the specifications set out under Chapter 4.2 of the NHBC Standards. It is the Contractors responsibility to ensure that all underground services have been located and identified in advance of tree pit excavation.

No tree species/location/specification will be amended without prior approval from the project Landscape Architect and/or the Client.

Rev E 13/01/2021 Updated to latest survey information.
Rev D 12/06/2020 Hard surfacing details included.
Rev C 04/05/2020 Updated to latest scheme.
Rev B 28/01/2019 Amended in line with client instruction.
Rev A 22/01/2019 Amended in line with client comments.

Project
Lodge Park
Knight's Lane, Bretby
Drawing title
Tree Planting Proposals

Client
Mr D Willshee

Scale
1:500 @ A1
Checked
JG
Date
08/01/2019
Number/Figure
GL0797 01E

